

MML-AP*4BH-E**


Floor Standing Concealed Type

Cool air makes for a pleasant indoor environment


Install it under a window and air-condition any room effectively.

Easy maintenance

Simplified design of fan and drainage pipe eases maintenance.

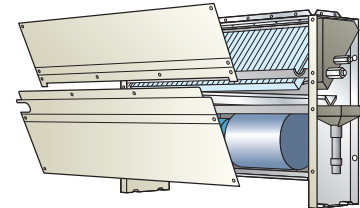

MML-AP0074BH-E to AP0244BH-E

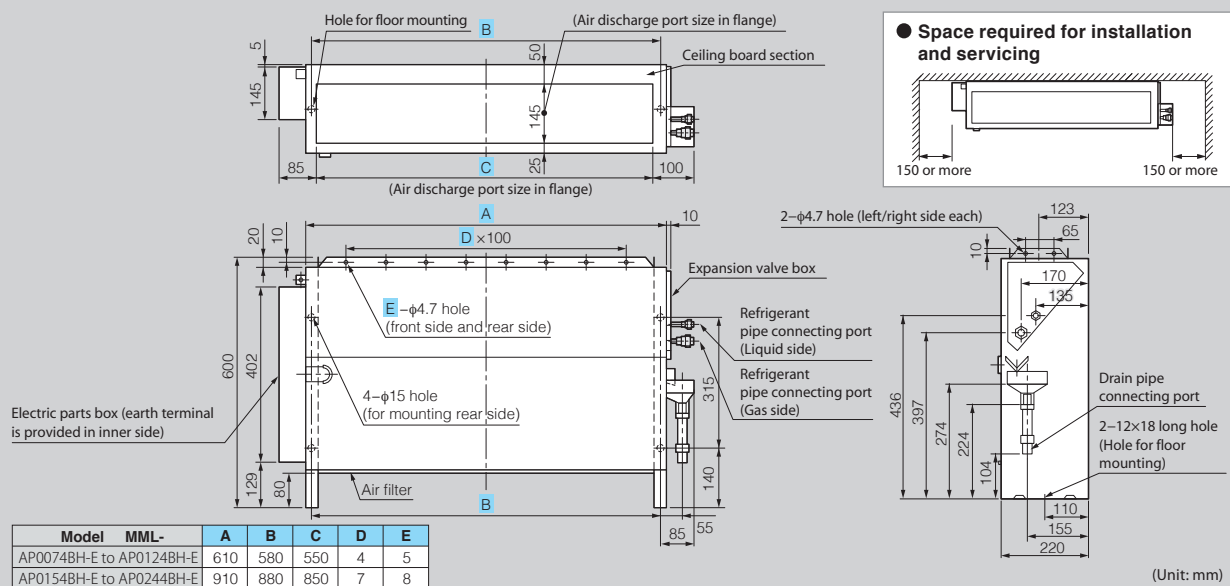

Technical specifications

Model name	MML-	AP0074BH-E	AP0094BH-E	AP0124BH-E	AP0154BH-E	AP0184BH-E	AP0244BH-E
Cooling/Heating capacity*1	(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)					
	Power consumption 50 Hz/60 Hz	(kW)	0.056/0.058		0.090/0.096		0.095/0.110
External dimensions	Height	(mm)	600				
	Width	(mm)	745				1045
	Depth	(mm)	220				
Total weight	(kg)	21				29	
Fan unit	Standard air flow (High/Mid/Low)	(m ³ /h)	460/400/300		740/600/490		950/790/640
	Motor output	(W)	19		70		
Connecting pipe	Gas side	(mm)	ø9.5		ø12.7		ø15.9
	Liquid side	(mm)	ø6.4				
	Drain port	(nominal dia.)	20 (Polyvinyl chloride tube)				
Sound pressure level*2 (High/Mid/Low)	(dB(A))	36/34/32				42/37/33	

*1 This reference piping consists of 5 m of main piping and 2.5 m of branch piping connected at the same height level.

*2 The actual values in an external operating environment are generally higher than the indicated values due to the contribution from ambient noise.